


Features and Benefits

- Superior thermal performance
- 3.5 W/m-K thermal conductivity
- Electrically isolating
- RoHS compliant
- Halogen-free

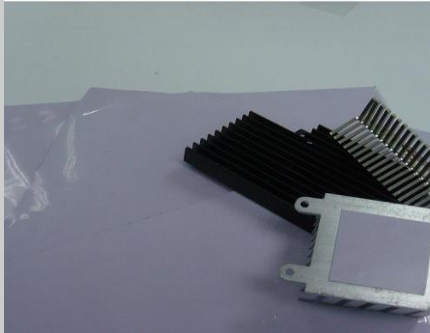

Typical Applications

- Notebook Computers
- Handheld Portable Electronics
- Micro Heat Pipe assemblies
- Micro Processors, Memory Chips and Graphic Processors
- Motor Control
- Wireless Communication Hardware

Optional Configurations

- Can be die-cut into other dimensions

OP-8500 Spec 07 offers good thermal performance and conformability. This material conforms to surface irregularities under low application pressures. It is electrically non-conductive and naturally tacky. Additional adhesive is generally not required.

The proprietary formulation of OP-8500 Spec 07 is RoHS compliant and halogen-free, providing extra reassurance in applications where hazardous substances are forbidden.


Properties	OP-8500 Spec 07	Test Method
Construction & Composition	Soft silicone elastomer	—
Color	Violet	Visual
Thickness Range /inch (mm)	0.02"~0.40" (0.508~10.16) in 0.01" (0.254) increments	—
Standard Sheet Size	12" x 16"	—
Density /g.cm ⁻³	3.0	—
Hardness /Shore 00	35	ASTM D2240
Tensile Strength /psi	34	ASTM D412
UL Flammability Rating	UL94 V0	—
Temperature Range /°C	-40°C~200°C	—
Thermal Conductivity/W.m ⁻¹ .K ⁻¹	3.5	ASTM D5470 (modified)
Breakdown Voltage /V	>4000 (Thickness = 0.02~0.04") >6000 (Thickness ≥ 0.04")	ASTM D149
Volume Resistivity /ohm.cm	8.3 x 10 ¹³	ASTM D257
Dielectric Constant @ 1000Hz	8.0	ASTM D150
Shelf Life /Months	24	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for ≤ 0.02" (0.5mm)
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Not Recommended
Detachable Adhesive (DA)	Optional to ≥ 0.039" (1.0mm)
Aluminum Foil (AL)	Optional to ≥ 0.039" (1.0mm)
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Optional to all thickness

Product Code and Descriptions

OP 85 XX Spec 07 -XX -XX -XX -XX

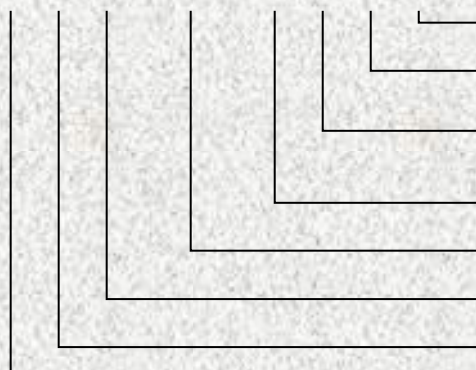

Dimensions
 SS = Standard sheet size
Release Liner
 ST = Standard
 OT = Other
PSA
 A1 = One side
 A2 = Both sides
 OT = Other
Carrier
 FG = Fiberglass
 AL = Aluminum foil
 CB = Combination
 OT = Other
Spec 07 = Special Derivative #
Thickness (mil)
 00 = Custom thickness
 04 = 40mil
85 = 8500 Series
OP = OPTIM™ gap filler

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606,
 USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge),
 Belgium

SEM (Far East) Ltd.


+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T.,
 Hong Kong.

SEM (Dongguan) Ltd.


+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.

Thermal Impedance of OP-8500 Spec 07

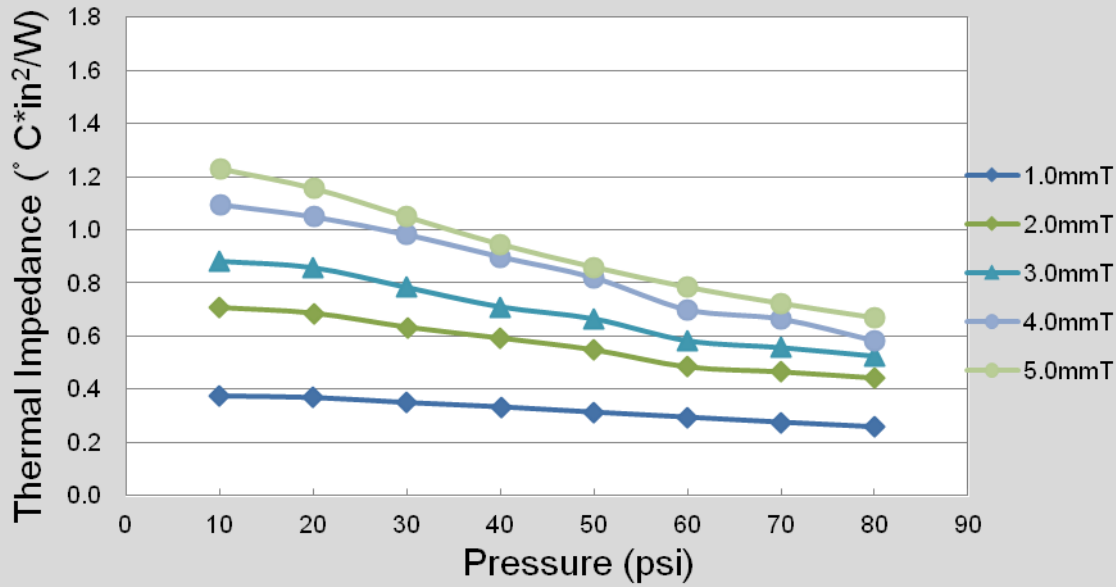

% Compression of OP-8500 Spec 07

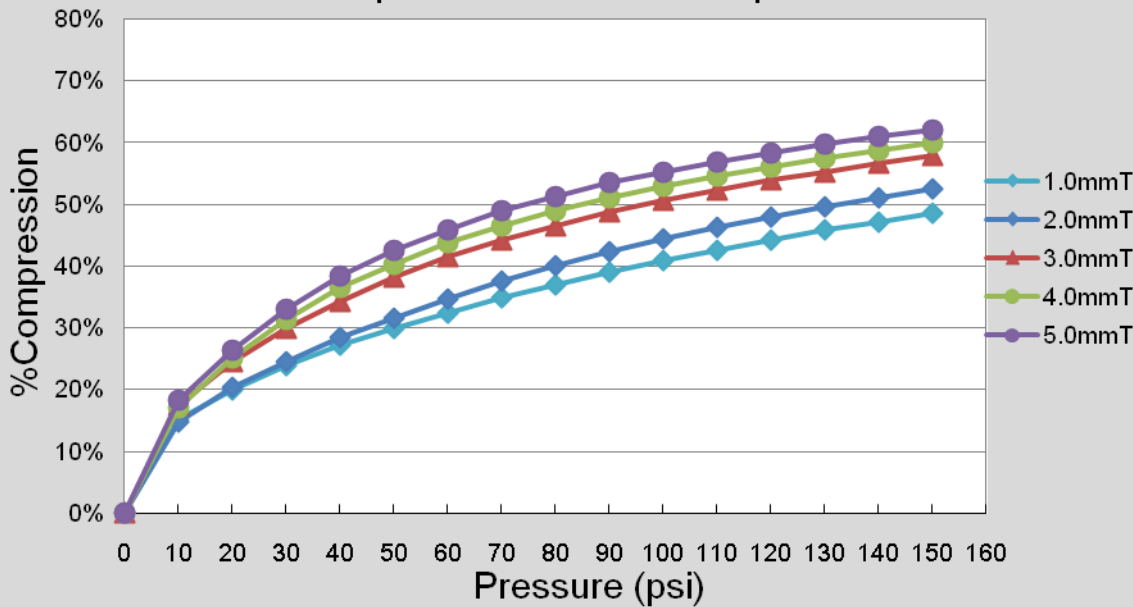

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A,
 Rochester, NY 14606,
 USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.