

OU-806 is a high performance thermally conductive compound and will not dry out. It has low viscosity for easy and neat application; and can be used for application involving auto-dispensing equipments.

The proprietary formulation of OU-806 makes for its good thermal conducting performance. Together with its superior wetting properties in filling surface irregularities, OU-806 provides effective solution for application where rapid heat transfer from heat source to spreader is required.

OU-806 is RoHS compliant and halogen-free, offering extra reassurance in applications where hazardous substances are forbidden.


Features and Benefits	Typical Applications	Optional Configurations
<ul style="list-style-type: none"> • 6.0W/m-K thermal conductivity • Excellent thermal conductivity • Never dries • RoHS compliant • Halogen-free • Suitable for auto-dispensing 	<ul style="list-style-type: none"> • Heat source to spreader/sink in computer and peripherals • Power conversion equipments • Cooling components to the chassis, frame or other types of heat spreader • Wireless communication hardware • Automotive control units • Power supply • Audio and video component • Micro processor 	<ul style="list-style-type: none"> • Cartridge packaging forms can be arranged upon request

Typical Properties	OU-806	Test Method
Construction & Composition	Silicone-based putty	—
Color	Grey	Visual
Density (g.cm ⁻³)	3.3	—
Flow Rate [g/min, 30cc syringe under 90psi]	10	—
Temperature Range (°C)	-40~180°C	—
Dielectric Strength (Vac/mm)	>5000	ASTM D149
Thermal Conductivity (W.m ⁻¹ .K ⁻¹)	6.0	ASTM D5470 (modified)
UL Flammability Rating	UL94 V0	—
Shelf Life /Months	24	—

Please contact us for other special requirements

Container Information		
OU-806	0030	30cc Taper Tip Tube
	Customer Part Number	Customer Container

Dispenser equipment is required. Please contact us for additional support. Other custom container sizes may be available

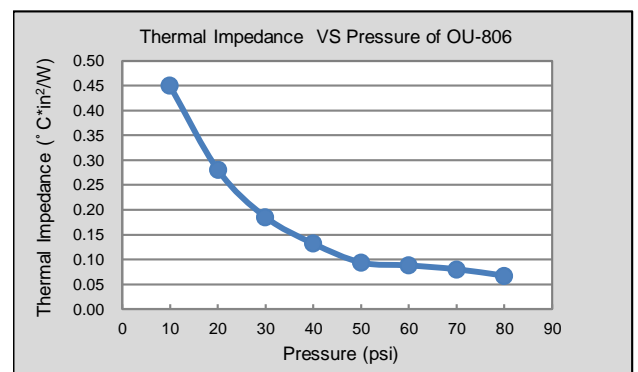

SEM (North America) Inc.

Tel: +1 585-643-2000
 Fax: +1 585-427-7216
 Address: 1600 Lexington Ave., Suite 236A
 Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270
 +32 59 560 271
 Slijpesteenweg 28,
 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872
 +852 2686 9728
 Unit 3, 3/F, Blk A, New Trade Plaza,
 No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686
 +86-769-8334 2028
 No.8 Qiaoxin Rd., Qiaotou Dongguan,
 Guangdong, China, 523525.

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.