


High Compressible Gap Filler



conductive compound and will not dry out. The surface consistency is excellent for filling surface irregularities as OU-809P is Sheet structure, which is convenient to use.

OU-809P is a high Compressible Gap Filler (Putty Type) with high performance thermally

OU-809P provides a cost effective solution for application where rapid heat transfer from heat source to spreader is required.

OU-809P is RoHS compliant and halogen-free, offering extra reassurance in applications which hazardous substances are forbidden.


Typical Applications


- · Heat source to spreader/sink in computer and peripherals
- Power conversion equipments
- Cooling components to the chassis, frame or other types of heat spreader
- · Wireless communication hardware
- · Automotive control units
- Power supply
- Audio and video component
- Micro processor


ı	rea	tur	es	and	В	en	eti	ts

- 9.0W/m-K thermal conductivity
- Excellent thermal conductivity
- Never dries
- RoHS compliant
- Halogen-free

Typical Properties	OU-809P	Test Method	
Construction & Composition	Silicone-based putty		
Color	Gray	Visual	
Thickness Range /inch (mm)	0.04"~0.40" (1.0~10.16) in 0.01" (0.254) increments		
Standard Sheet Size(mm)	200 * 400		
Density (g.cm ⁻³)	3.4		
Thermal Conductivity (W.m ⁻¹ .K ⁻¹)	9	ASTM D5470 (modified)	
Breakdown Voltage(KV/mm)	10	ASTM D149	
Dielectric Strength (KVac/mm)	N/A	ASTM D149	
Temperature Range (°C)	-40~180°C		
UL Flammability Rating	UL94 V0		
Shelf Life /Months	24		



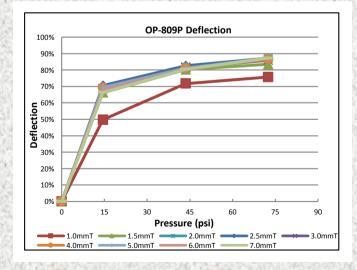



SEM (North America) Inc.

Tel: +1 585-643-2000 Fax: +1 585-427-7216 Address: 1600 Lexington Ave., Suite 236A Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270 +32 59 560 271 Slijpesteenweg 28, 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872 +852 2686 9728 Unit 3, 3/F, Blk A, New Trade Plaza, No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686 +86-769-8334 2028 No.8 Qiaoxin Rd., Qiaotou Dongguan, Guangdong, China, 523525.