


Profile E63

PSA Width: 0.188 [4.8]

inches [mm]

Rectangle

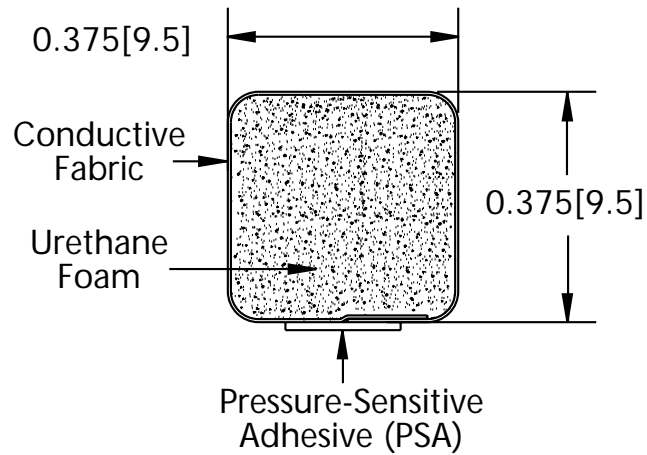

E63

Dimensions for reference only


ACTUAL SIZE



THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 20% Recommended Maximum Compression: 70%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

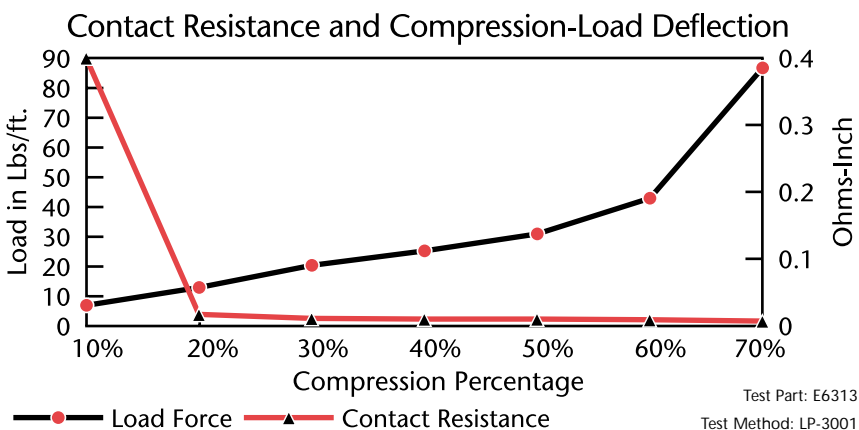

EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.


www.schlegel.com

©2004 Schlegel Systems, Inc.

Profile E64

inches [mm]

D-Shape (Self-Mounting)

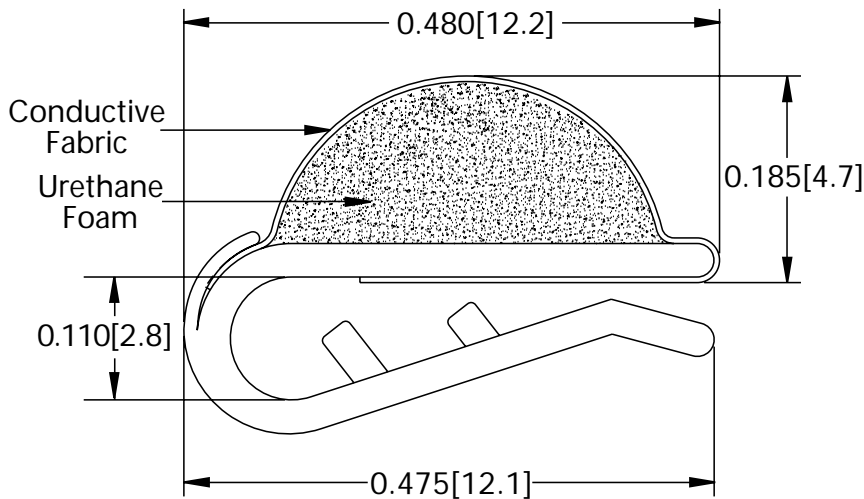

E64

Recommended flange thickness is 0.066 - 0.088 [1.7 - 2.2]

Dimensions for reference only


ACTUAL SIZE

THINK SCHLEGEL®
FOR SHIELDING.



Recommended Minimum Compression: 30% Recommended Maximum Compression: 60%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

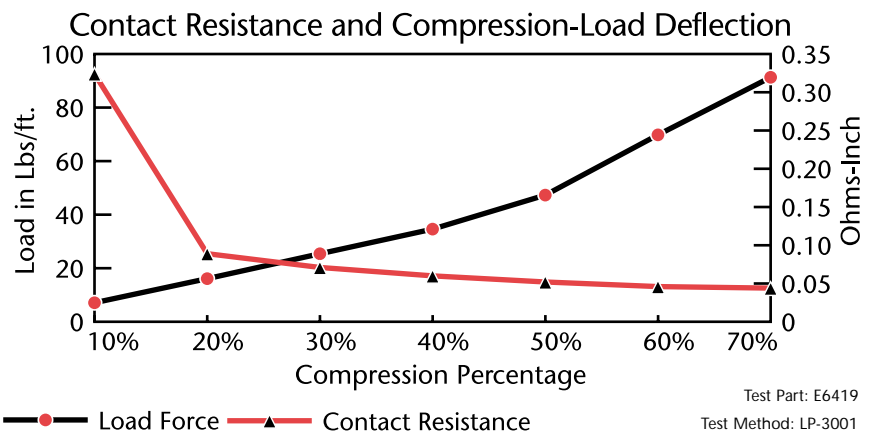

EMI Shielding
Products



See tab 2 (Gaskets Overview) for icon definitions

UL is a registered trademark of Underwriters Laboratories, Inc.

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E65

PSA Width: 0.125 [3.2]

inches [mm]

Rectangle

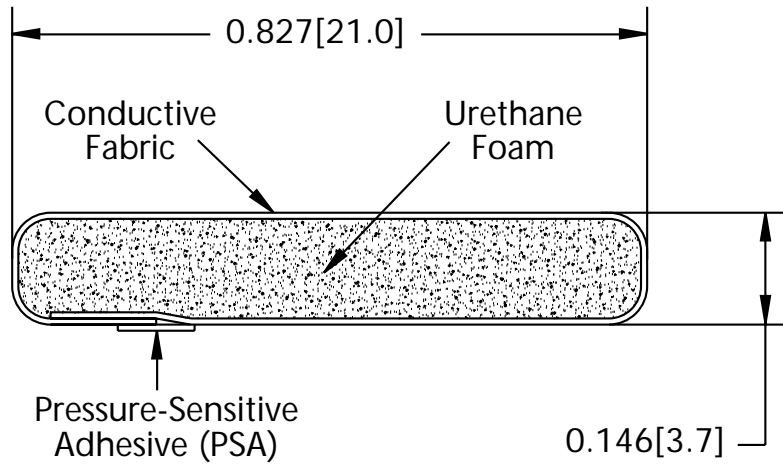

E65

Dimensions for reference only

ACTUAL SIZE




THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 10% Recommended Maximum Compression: 70%



Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

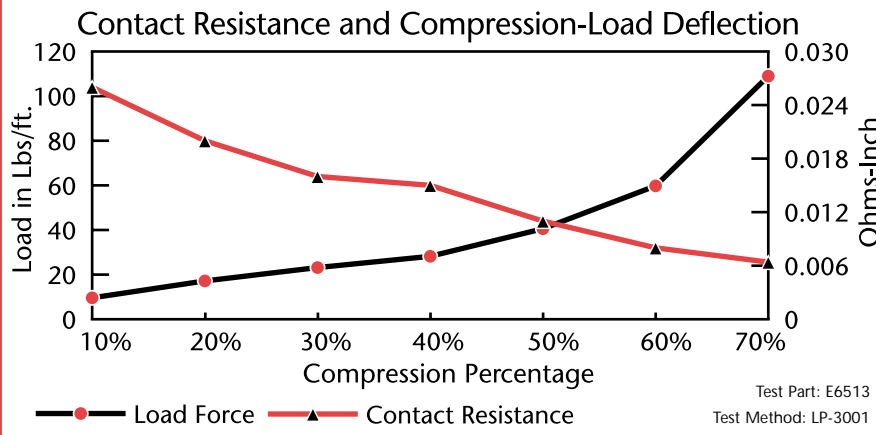

UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

EMI Shielding Products



www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E66

PSA Width: 0.188 [4.8]

inches [mm]

Rectangle

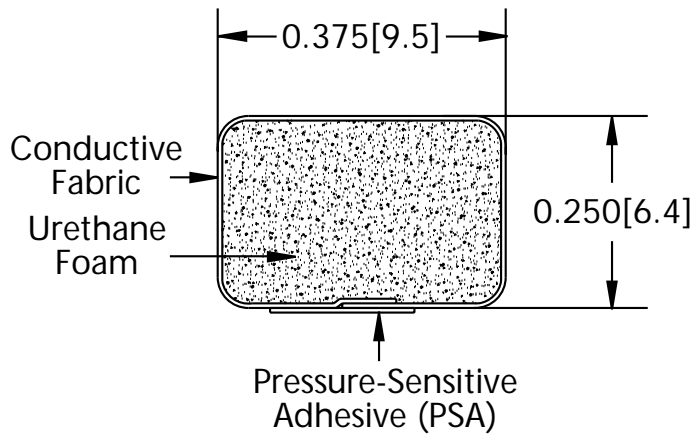

E66

Dimensions for reference only

ACTUAL SIZE




THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 30% Recommended Maximum Compression: 70%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

Contact Resistance and Compression-Load Deflection

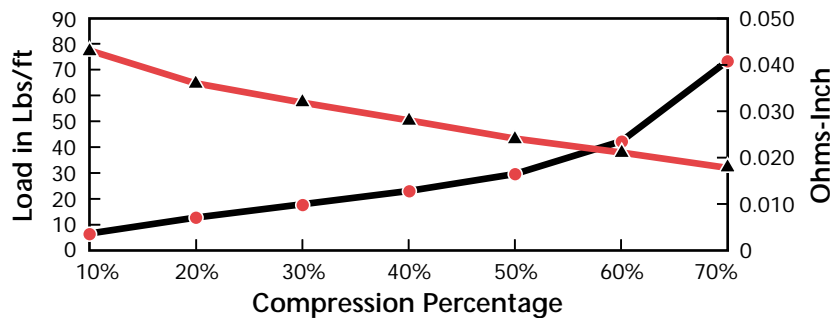

Test Part: E6619
Test Method: LP-3001



EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E67

PSA Width: 0.250 [6.4]

inches [mm]

Knife Edge

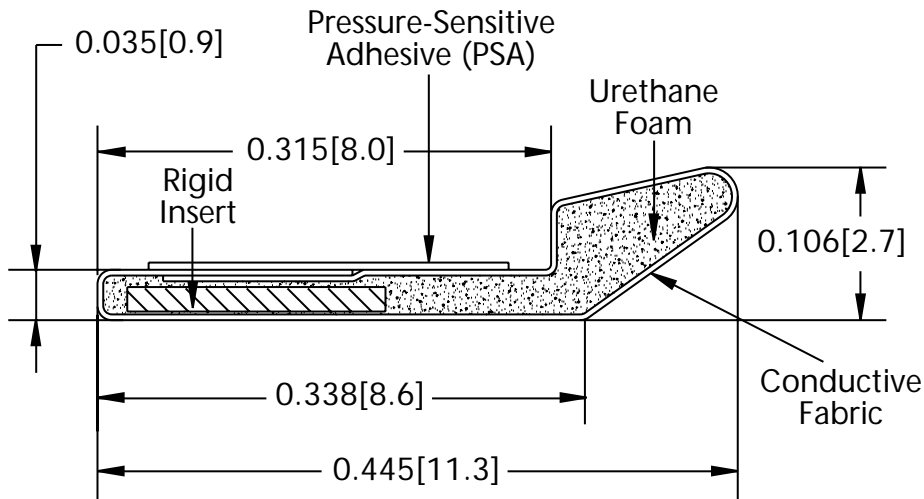

E67

Dimensions for reference only


ACTUAL SIZE



THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 10% Recommended Maximum Compression: 50%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

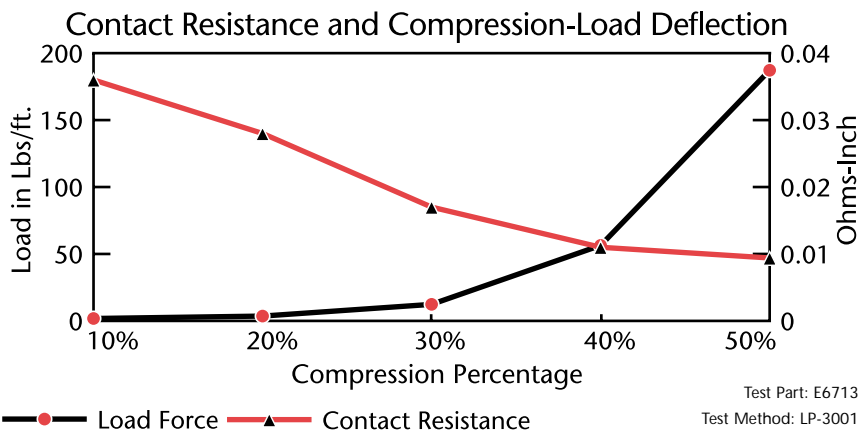

EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E68

PSA Width: 0.250 [6.4]

inches [mm]

Rectangle

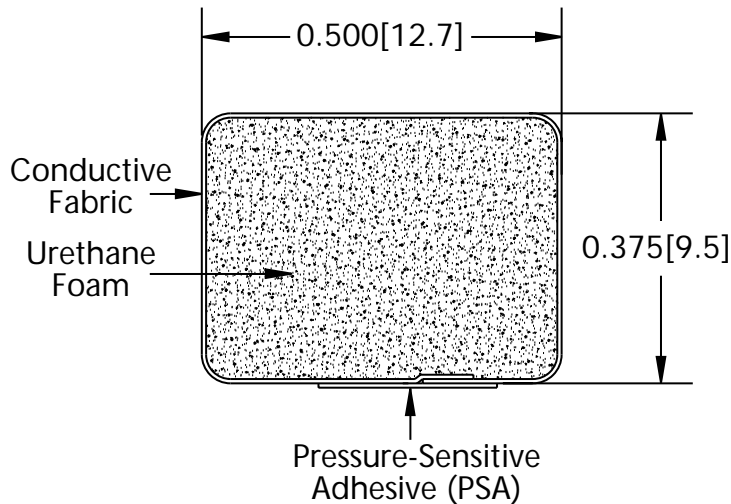

E68

Dimensions for reference only


ACTUAL SIZE



THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 10% Recommended Maximum Compression: 70%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

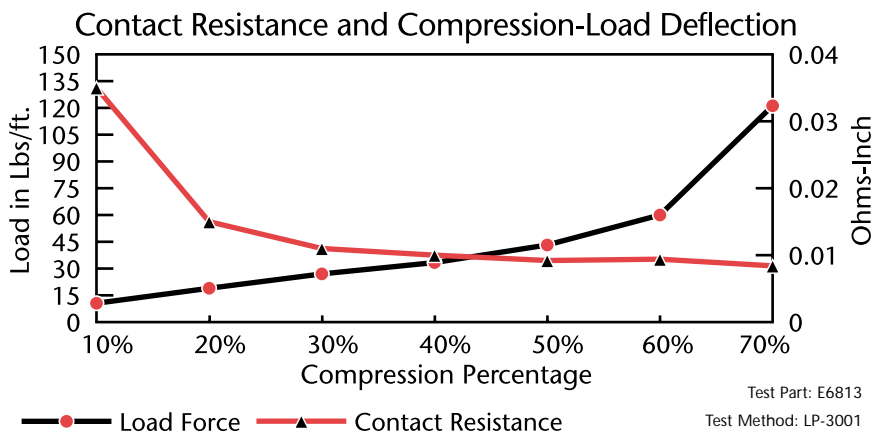

EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.


www.schlegel.com

©2004 Schlegel Systems, Inc.

Profile E69

inches [mm]

Rectangle

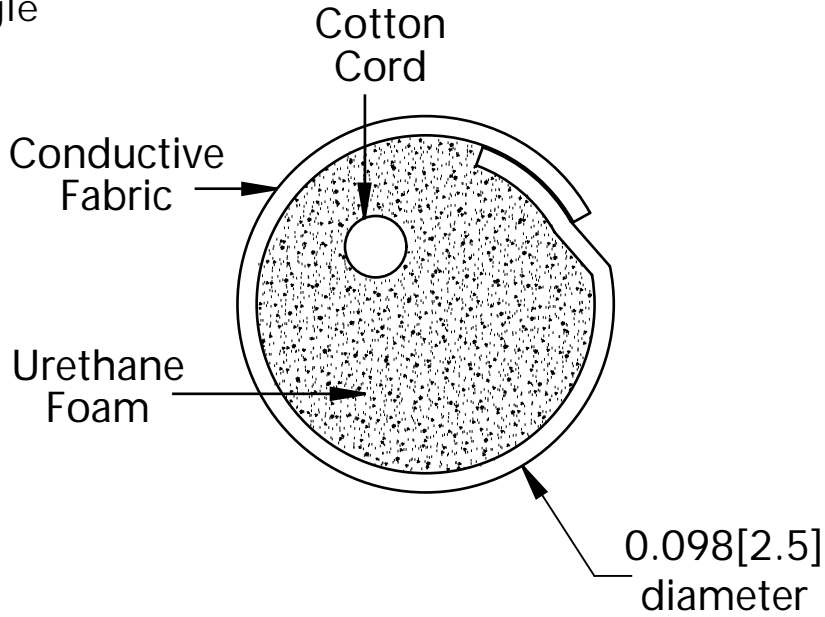

E69


Dimensions for reference only

ACTUAL SIZE

THINK SCHLEGEL® FOR SHIELDING.

Recommended Minimum Compression: 10% Recommended Maximum Compression: 60%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

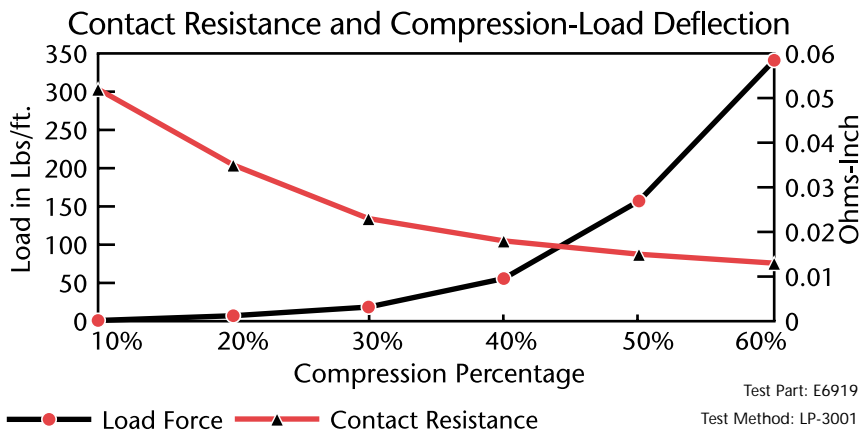

EMI Shielding Products



See tab 2 (Gaskets Overview) for icon definitions

UL is a registered trademark of Underwriters Laboratories, Inc.

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E70

PSA Width: 0.125 [3.2]

inches [mm]

Rectangle

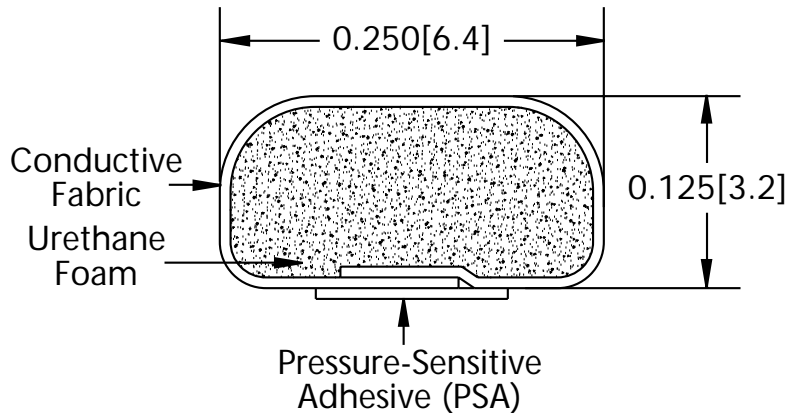

E70

Dimensions for reference only


ACTUAL SIZE



THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 20% Recommended Maximum Compression: 70%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

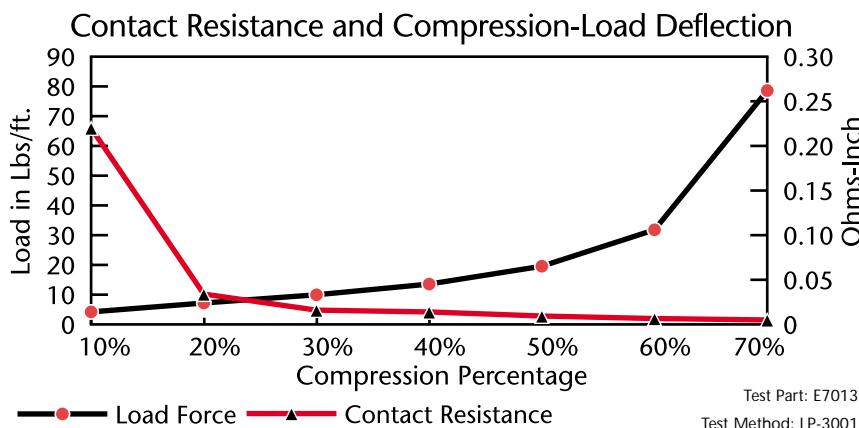

EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com


©2004 Schlegel Systems, Inc.

Profile E73

PSA Width: 0.125 [3.2]

inches [mm]

Rectangle

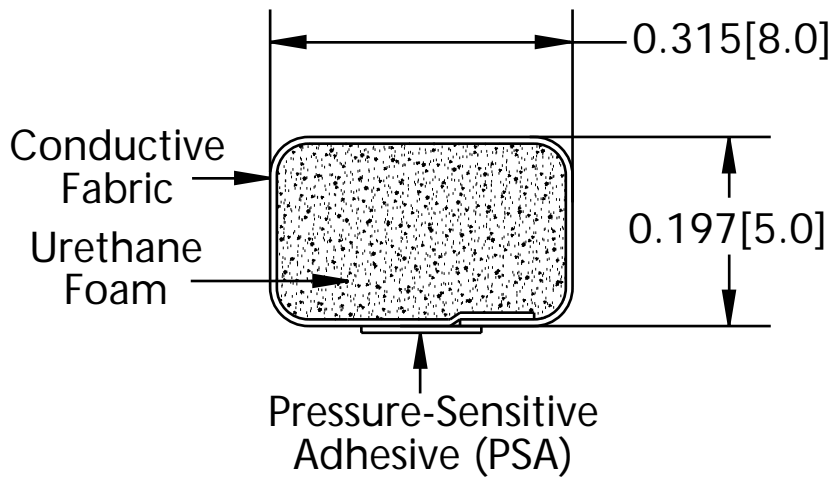

E73

Dimensions for reference only


ACTUAL SIZE



THINK SCHLEGEL®
FOR SHIELDING.

Recommended Minimum Compression: 10% Recommended Maximum Compression: 70%

Contact resistance between a shielding gasket and the mating surface is related to applied load and percent compression of the gasket. This table is intended to assist in defining the optimum design range for an application. Determined by commonly accepted test procedures under controlled conditions, these values may differ from actual performance under specific operating conditions. Contact a Schlegel EMI representative for design assistance and additional information.

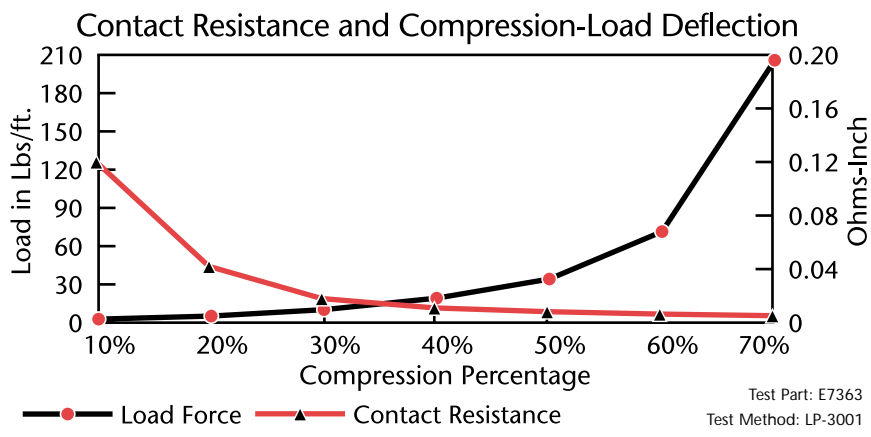

EMI Shielding
Products



UL is a registered trademark of Underwriters Laboratories, Inc.

See tab 2 (Gaskets Overview) for icon definitions

The preceding information is believed accurate by Schlegel EMI. In no event, however, shall Schlegel EMI have any liability whatsoever for inaccuracies or omissions contained therein. In all cases, details and values should be verified by the customer. These products are covered by various U.S. and foreign patents.

www.schlegel.com

©2004 Schlegel Systems, Inc.