


THERMALLY CONDUCTIVE GAP FILLER

Features and Benefits

- 10.0W/m-K thermal conductivity
- Naturally tacky
- RoHS compliant
- Halogen-free



Typical Applications

- Notebook Computers
- Power conversion equipments
- Power supplies
- Large telecommunication switching hardware

Optional Configurations

• Can be die-cut into other dimensions

The proprietary metal filler formula of OP-9700 offers superior thermal performance with moderate compressibility.

This thermally conductive gap filler is RoHS and halogen-free compliant. It is suitable for applications where high thermal performance and stringent control of hazardous constituents are required.


OP-9700 is naturally tacky. Additional adhesive is generally not required.

Properties	OP-9700 Series	Test Method
Construction & Composition	Soft silicone elastomer	-
Color	Grey	Visual
Thickness Range /inch (mm)	0.03"~0.4" (0.762 ~10.16) in 0.01" (0.254) increments	
Standard Sheet Size	9" x 9"	
Density /g.cm ⁻³	2.50	
Hardness /Shore 00	60	ASTM D2240
UL Flammability Rating	UL94 V1	
Temperature Range /℃	-40℃~200℃	
Thermal Conductivity /W.m ⁻¹ .K ⁻¹	10.0	ASTM D5470 (modified)
Shelf Life /Months	24	

Please contact us for other special requirements

Carrier Treatment	Criteria	
Fiber Glass (FG)	Not Recommended	
Rubberized Cloth (RC)	Not Recommended	
Pressure Sensitive Adhesive (PSA)	Not Recommended	
Detachable Adhesive (DA)	Not Recommended	
Aluminum Foil (AL)	Not Recommended	
Kapton (PI)	Not Recommended	
Talc treatment (DAT)	Optional to all thickness	

Product Code and Descriptions

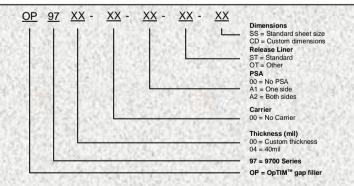

SEM (North America) Inc.

Tel: Fax: Address: +1 585-643-2000 +1 585-427-7216 1600 Lexington Ave., Suite 236A, Rochester, NY 14606, USA

SEM Belgium byba

+32 59 560 270 +32 59 560 271 Slijpesteenweg 28, 8432 Middelkerke (Leffinge), Belgium


SEM (Far East) Ltd.


+852 2686 9872 +852 2686 9728 Unit 3, 3/F, Blk A, New Trade Plaza, No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686 +86-769-8334 2028 No.8 Qiaoxin Rd., Qiaotou Dongguan, Guangdong, China, 523525.

THERMALLY CONDUCTIVE GAP FILLER

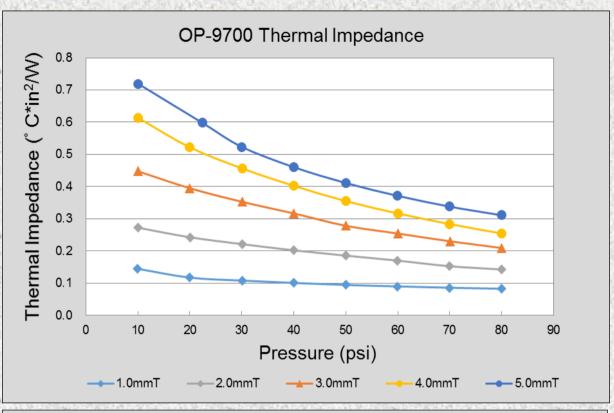

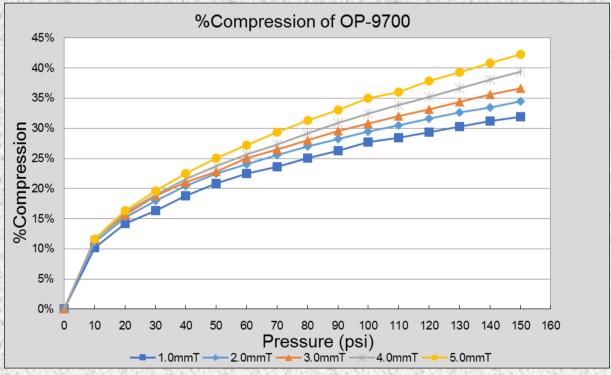

SEM (North America) Inc.

Tel: Fax: Address: +1 585-643-2000 +1 585-427-7216 1600 Lexington Ave., Suite 236A, Rochester, NY 14606, USA

SEM Belgium bvba

+32 59 560 270 +32 59 560 271 Slijpesteenweg 28, 8432 Middelkerke (Leffinge), Belgium

SEM (Far East) Ltd.

+852 2686 9872 +852 2686 9728 Unit 3, 3/F, Blk A, New Trade Plaza, No. 6 On Ping St., Shatin, N.T., Hong Kong.

SEM (Dongguan) Ltd.

+86-769-8356 5686 +86-769-8334 2028 No.8 Qiaoxin Rd., Qiaotou Dongguan, Guangdong, China, 523525.